

**BL114H**



系列產品，0.5mm間距，超低高度1.2mm，無蓋設計，是可攜式電子產品中電子連接器的最佳選擇。

series has excellent product specification, 0.5mm pitch, ultra-low height of 1.2mm, and no cover design, it's the best choice of electronic connectors to be used in portable electronic products.

性質 Characteristic	規格 Specifications
連接器型式 Connector Type	Slider
間距 / Pitch (mm)	0.5
高度 / Height (mm)	1.2
接點數量 Number of Contacts	4 ~ 50
組合樣式 Assembly Style	臥式 / 上接觸點或下接觸點 Right Angle / Upper (Lower) Contact
最大容許電壓 Operating Voltage (Max.)	50Vrms AC
最大容許電流 Current Rating (Max.)	0.4A
使用溫度範圍 Operating Temperature	-55°C ~ +85°C (包含電流通過所產生的上昇溫度) (Including terminal temperature rise)
材質 - 絕緣膠體 Material - Housing	L.C.P
材質 - 滑蓋 Material - Actuator	L.C.P
材質 - 導電端子 Material - Contacts	磷青銅 Phosphor Bronze

**SCG**

## 特色 / FEATURES

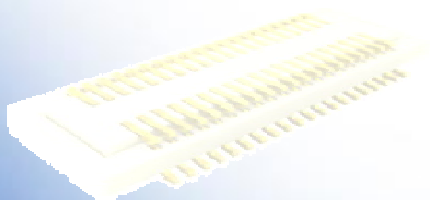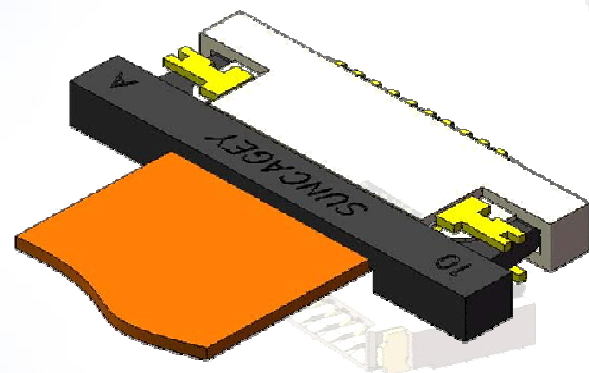

1

- 低高度滑蓋設計
- Low profile in Slider connector

2

- 2款接觸點選項
- 2 kinds of contact choice



3

- 強壯的FPC保持力
- Strong FPC retention force



## 特色 / FEATURES

低高度 滑蓋設計  
Low profile in Slider connector

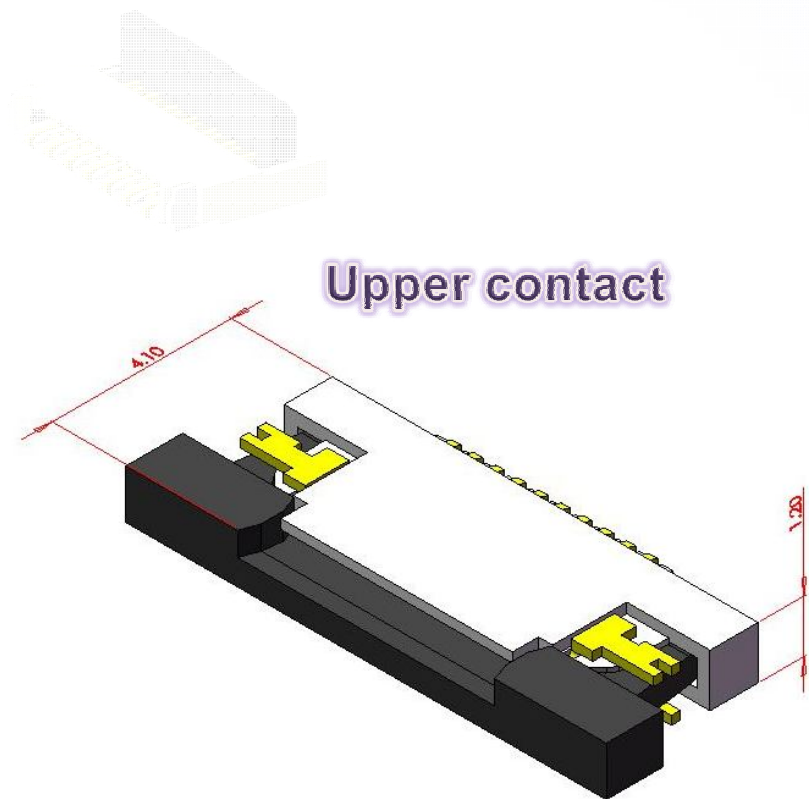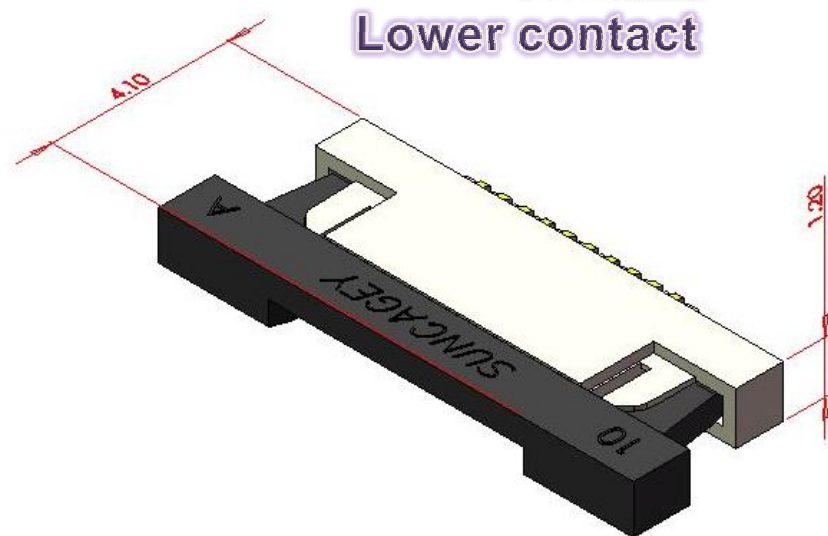


Low profile of 1.2mm height when mounted.


## 特色 / FEATURES

2款接觸點選項  
2 kinds of contact choice

RL-Right Angle / Lower Contact

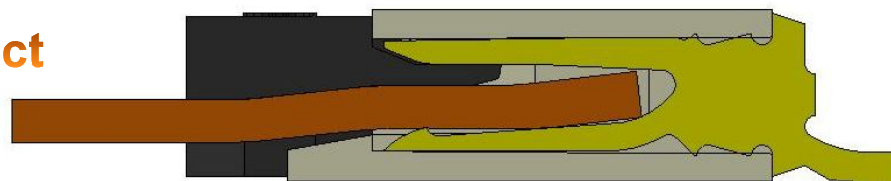

RU-Right Angle / Upper Contact

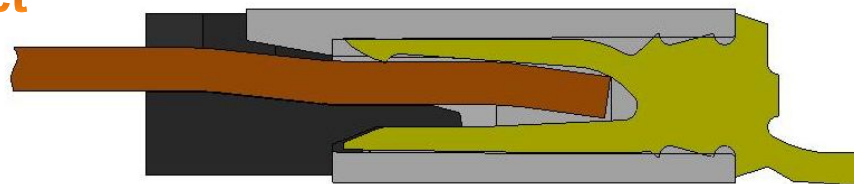

Either upper or lower contact available.

## 特色 / FEATURES

強壯的FPC保持力  
Strong FPC retention force

